Eberspächer

AIR CONDITIONING SYSTEM WITH HEAT PUMP FUNCTION

BREEZONIC PERFORMANCE & BREEZONIC PERFORMANCE PLUS

The high-performance Breezonic Air Conditioning System with integrated heat pump functionality represents a new state-of-the-art rooftop unit. Its advanced inverter technology ensures quiet, consistent operation while minimizing energy consumption through a speed-controlled compressor. Developed for maximum efficiency, the unit offers eight operating modes to perfectly match your individual comfort requirements. Two versions are available:

Breezonic Performance: delivers 2.5 kW cooling capacity and 2.4 kW heating capacity.
Breezonic Performance Plus: the more powerful model, delivering 3.5 kW cooling capacity and 3.6 kW heating capacity.

PRODUCT BENEFITS:

- Dual cooling and heating functionality with integrated heat pump technology
- Extremely quiet operation with variable speed compressor
- Very low current and soft-ramp up
- Very flat design
- Night mode for quiet operation during sleep
- Eco mode
- Very fast interior cooling using the turbo cooling function

ADDITIONAL FEATURES :

- Various control options via touch screen on interior panel (ADB), remote control, App (via Bluetooth) or central HMI possible
- Very slim and stylish design of the interior panel with integrated, dimmable LED lighting
- Multiple function settings available: Heating, Cooling, Automatic, Timer, Turbo, Eco, De-Humidification, Fan only, 3 fan speed settings
- Operating temperature from -7 to +52°C
- Two units can be controlled simultaneously in a group or individually in the app or via EasyStart Touch
- Available in white or black

SEGMENTS:

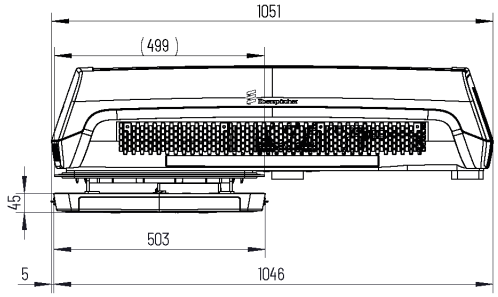

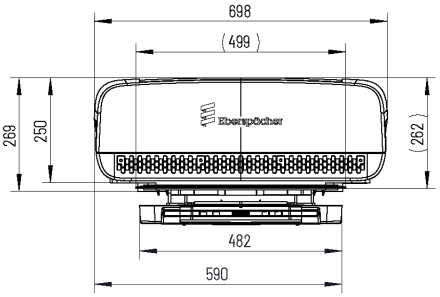

TECHNICAL DATA:

BREEZONIC		BREEZONIC PERFORMANCE	BREEZONIC PERFORMANCE PLUS
Voltage	V	230 V AC / 50 Hz	
Cooling performance	W	2.500	3.500
Heating performance	W	2.400	3.600
Weight Rooftop / Air Distribution Box (ADB)	kg	31,5 / 2,8	35,0 / 2,8
Current max. average cooling	A	4,1	6,5
Current max. average heating	A	4,2	6,0
Max. airflow	m^3/h	542	608
Refrigerant		R32	
Dimensions of roof unit (L x B x H)	mm	1.051 x 698 x 250	
Dimensions of interior unit (L x B x H)	mm	503 x 482 x 45	
Hatch / Roof openings	mm	360 x 360 / 400 x 400	
Roof thickness (standard)	mm	25 – 70	
Roof thickness (with additional kit)	mm	75 – 100 & 75 - 170	
Communication interfaces		Bluetooth (app) & CI- Bus, RV-C	
Control unit		Control via app, touch screen control panel on device and via remote control (as optional accessory)	
Part number black unit	●	29 0218 41 0007	29 0218 41 0009
Part number white unit	○	29 0218 41 0001	29 0218 41 0002
Part number Air Distribution Box black (ADB)	●	29 0218 11 0004	
Part number Air Distribution Box white (ADB)	○	29 0218 11 0001	
Part number remote control*		29 0248 27 0001	

*Further specific accessories like Return Air Grille & EasyStart Touch on request

EBERSPÄCHER CLIMATE CONTROL SYSTEMS INTERNATIONAL GMBH

Eberspächerstraße 24 | 73730 Esslingen | GERMANY | Phone: +49 711 939-00 | Fax: +49 711 939-0634 | info@eberspaecher.com | www.eberspaecher-motorhomes.com

Version 05 EN – 05/26 – Subject to change without notice.